

# Broadband 3-D Shared Aperture High Isolation Nine-Element Antenna Array for On-Demand Millimeter-Wave 5G Applications

Mohammad Alibakhshikenari<sup>1\*</sup>, Bal S. Virdee<sup>2</sup>, Valeria Vadalà<sup>3</sup>, Mariana Dalarsson<sup>4</sup>, María Elenade Cos Gómez<sup>5</sup>, Abdullah G. Alharbi<sup>6</sup>, Shah Nawaz Burokur<sup>7</sup>, Sonia Aïssa<sup>8</sup>, Iyad Dayoub<sup>9</sup>, Francisco Falcone<sup>10,11</sup>, Ernesto Limiti<sup>12</sup>

<sup>1</sup>Department of Signal Theory and Communications, Universidad Carlos III de Madrid, 28911 Leganés, Madrid, Spain (e-mail: mohammad.alibakhshikenari@uc3m.es)

<sup>2</sup>Center for Communications Technology, London Metropolitan University, U.K. (e-mail: b.virdee@londonmet.ac.uk)

<sup>3</sup>Department of Engineering, University of Ferrara, 44122 Ferrara, Italy (e-mail: valeria.vadala@unife.it)

<sup>4</sup>School of Electrical Engineering and Computer Science, KTH Royal Institute of Technology, SE 100-44 Stockholm, Sweden (e-mail: mardal@kth.se)

<sup>5</sup>TSC. Electrical Engineering Department, University of Oviedo, 33203 Gijón, Spain (e-mail: medecos@uniovi.es)

<sup>6</sup>Department of Electrical Engineering, Faculty of Engineering, Jouf University, Sakaka 42421, Saudi Arabia (e-mail: a.g.alharbi@ieee.org)

<sup>7</sup>LEME, UPL, University Paris Nanterre, F92410, Ville d'Avray, France (e-mail: sburokur@parisnanterre.fr)

<sup>8</sup>Instituto de Telecomunicações, Campus Universitário de Santiago, Aveiro, 3810-193, Portugal (e-mail: i.t.e.elfergani@av.it.pt and jonathan@av.it.pt)

<sup>9</sup>Institut National de la Recherche Scientifique (INRS), University of Québec, Montréal, Québec H5A 1K6, Canada (e-mail: aissa@emt.inrs.ca)

<sup>10</sup>Université Polytechnique Hauts-de-France, CNRS, University of Lille, ISEN, Institut d'électronique de Microélectronique et de Nanotechnologie, and INSA des Hauts de France, Valenciennes, France (e-mail: iyad.dayoub@uphf.fr)

<sup>11</sup>Electric, Electronic and Communication Engineering Department, Public University of Navarre, 31006 Pamplona, Spain

<sup>12</sup>Institute of Smart Cities, Public University of Navarre, 31006 Pamplona, Spain (e-mail: francisco.falcone@unavarra.es)

<sup>12</sup>Electronic Engineering Department, University of Rome "Tor Vergata", Via del Politecnico 1, 00133 Rome, Italy (e-mail: limiti@ing.uniroma2.it)

\*Corresponding Authors: Mohammad Alibakhshikenari (e-mail: mohammad.alibakhshikenari@uc3m.es)

**ABSTRACT** The paper presents the results of a novel 3-D shared aperture 3×3 matrix antenna-array for 26 GHz band 5G wireless networks. Radiation elements constituting the array are hexagonal-shaped patches that are elevated above the common dielectric substrate by 3.35 mm and excited through a metallic rod of 0.4 mm diameter. The rod protrudes through the substrate of 0.8 mm thickness. It is shown that by isolating each radiating element in the array with a wall suppresses unwanted electromagnetic (EM) wave interactions, resulting in improvement in the antenna's impedance matching and radiation characteristics. Moreover, the results show that by embedding hexagonal-shaped slots in the patches improve the antenna's gain and radiation efficiency performance. The subwavelength length slots in the patches essentially transform the radiating elements to exhibit metasurface characteristics when the array is illuminated by EM-waves. The proposed array structure has an average gain and radiation efficiency of 20 dBi and 93%, respectively, across 24-28.4 GHz. The isolation between its radiation elements is greater than 22 dB. Compared to the unslotted array the improvement in isolation between radiating elements is greater than 11 dB, and the gain and efficiency are better than 10.5 dBi, and 25%, respectively. The compact array has a fractional bandwidth of 16% and a form factor of 20×20×3.35 mm<sup>3</sup>.

**INDEX TERMS** Array antennas, metasurface (MTS), isolation wall, 5G, shared aperture, three dimensional (3-D).

## I. INTRODUCTION

Worldwide deployment of 5G wireless communication systems is currently underway [1]. Unlike the previous

generations of cellular systems, 5G offers benefits of faster internet connectivity and capability to link with thousands of devices [2]. This technology makes the realization of Internet of Things (IoT) or Internet of Everything (IoE) possible as well as the creation of new ‘smart’ services capable of providing information in real-time. The frequency bands used in the initial phase of 5G deployment are between 700 MHz and 3.8 GHz. This frequency band were originally used for previous generations of mobile technology. The demand for bandwidth is expected to grow with greater usage of 5G. This demand can only be met by using the millimeter-wave 5G spectrum at 26 GHz. The large data transmission capacity [3] of the millimeter-band is associated with a high loss resulting from propagation, atmospheric loss, pathloss, dielectric-loss, radiation-loss, and metallic loss in transmission-lines [4],[5]. To compensate for such loss, research is now focused on antenna array technologies at the millimeter-wave band [6]–[9].

In this paper, a novel 3-D shared aperture  $3 \times 3$  antenna array concept is proposed for 5G millimeter-wave applications operating over 24-28.4 GHz. The antenna array consists of hexagonal-shaped patches that are perched above a common substrate and excited using metallic rods through the substrate. Individual antennas are decoupled from each other with an isolation wall to prevent unwanted mutual coupling that can degrade the overall far-field performance of the antenna. To enhance the gain and radiation efficiency of the antenna the patches are made to exhibit metasurface characteristics. This is achieved by loading the patches with hexagonal-shaped concentric slots of decreasing diameters. The feeding structure of the proposed array makes it amenable to either single aperture or shared aperture antenna applications as it covers a relatively wide bandwidth. This is achieved by grouping together individual antennas in the array to form sub arrays that are used to cover a specific portion of the total bandwidth for different applications on time/frequency shared basis [10], [11].

## II. 3D SHARED APERTURE NINE-ELEMENT ANTENNA ARRAY

Geometry of the proposed 3-D shared aperture nine element antenna array is shown in Fig. 1. The array consists of hexagonal-shaped patches that are constructed on the base dielectric substrate (Rogers RT5880) with a thickness of 0.2 mm, dielectric constant of 2.2, and  $\tan\delta$  of 0.0009. The radiating patches are elevated above the dielectric substrate by 3.35 mm using a metallic rod of 0.4 mm diameter. The base substrate of 0.8 mm thickness has a ground-plane. The metallic rods protrude through the base substrate and are insulated from the ground-plane metallization layer. Each antenna is excited through the metallic rods. By raising the antenna above the substrate effectively reduces surface

current interactions between adjacent antennas which can drastically undermine the antenna’s characteristics. The structural parameters of the array are listed in Table I. The overall size of the proposed basic antenna array is  $20 \times 20 \times 3.35$  mm<sup>3</sup>.

Theoretical modeling of such an array is provided in [12]. To validate the design of the proposed antenna array it was constructed and analyzed using two very different 3-D electromagnetic solvers, namely, CST Microwave Studio and Ansoft HFSS. The numerical EM-solver by Ansoft HFSS is based on frequency-domain finite-element method (FEM), and CST Microwave Studio is based on a time-domain finite integration technique (FIT) method.

The active S-parameters in Fig. 2(a) shows that the proposed basic antenna array exhibits an impedance bandwidth of 700 MHz and operates across 26.5 GHz - 27.2 GHz, which corresponds to a the fractional bandwidth (FBW) of 2.6%. The transmission-coefficient response between the radiation elements is shown in Fig. 2(b)-(i). These results show that the average isolation between the patches #2 to #9 relative to patch #1, i.e., the isolation between patches #1&#2 is 12 dB, #1&#3 is 6 dB, #1&#4 is 11 dB, #1&#5 is 7 dB, #1&#6 is 11 dB, #1&#7 is 12 dB, #1&#8 is 10 dB, and #1&#9 is 13 dB. The results are summarized in Table II.

The radiation characteristics of the proposed antenna array are shown in Fig. 3. It can be observed from this figure that an average gain and efficiency achieved over the antenna’s operating frequency band of 26.5 GHz - 27.2 GHz are 9.5 dBi and 68%, respectively. The radiation characteristics of the antenna array are summarized in Table III.

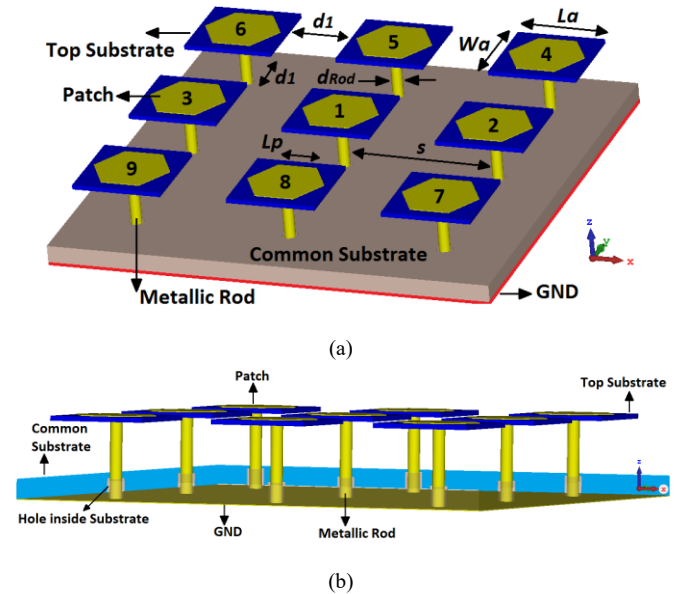


Fig.1. 3-D shared aperture nine element  $3 \times 3$  array antennas, (a) isometric top-view, and (b) side view.

TABLE I. GEOMETRICAL PARAMETERS OF THE ARRAY  
(units in millimeters)

Length	Width	$L_a$	$W_a$	$L_w$	$W_w$	$L_p$
20	20	4	4	5	5	1.75
$d_{hole}$	drod	$H_{rod}$	$H_w$	$hs_1$	$hs_2$	$d_1$
0.5	0.2	3.35	2	0.8	0.2	3
$d_2$	$s$	$g$	$Ws$	$Wml$	form factor	
2	7	0.25	0.08	0.2	20×20×3.35	

Note:  $Ws$  and  $Wml$  represent the width of the slots and meandered-lines, respectively. Some parameters are annotated in Figs. 4&5.

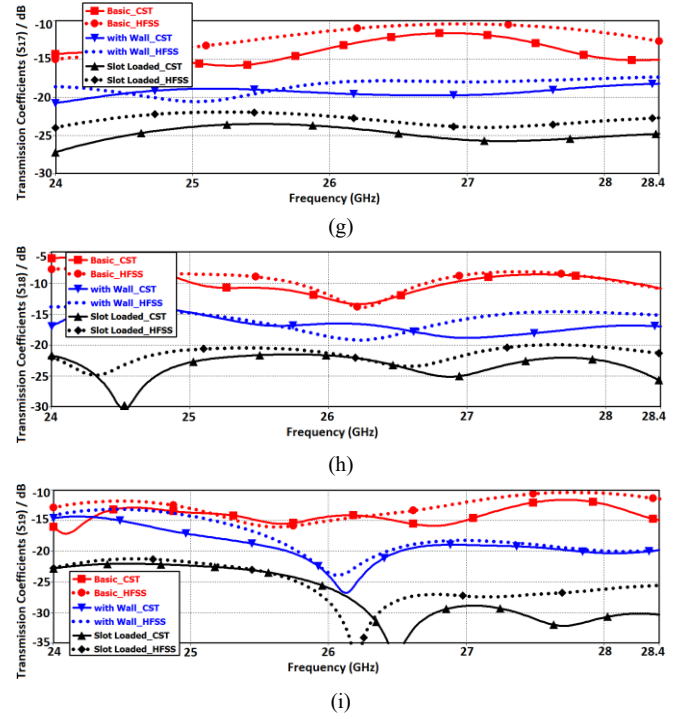
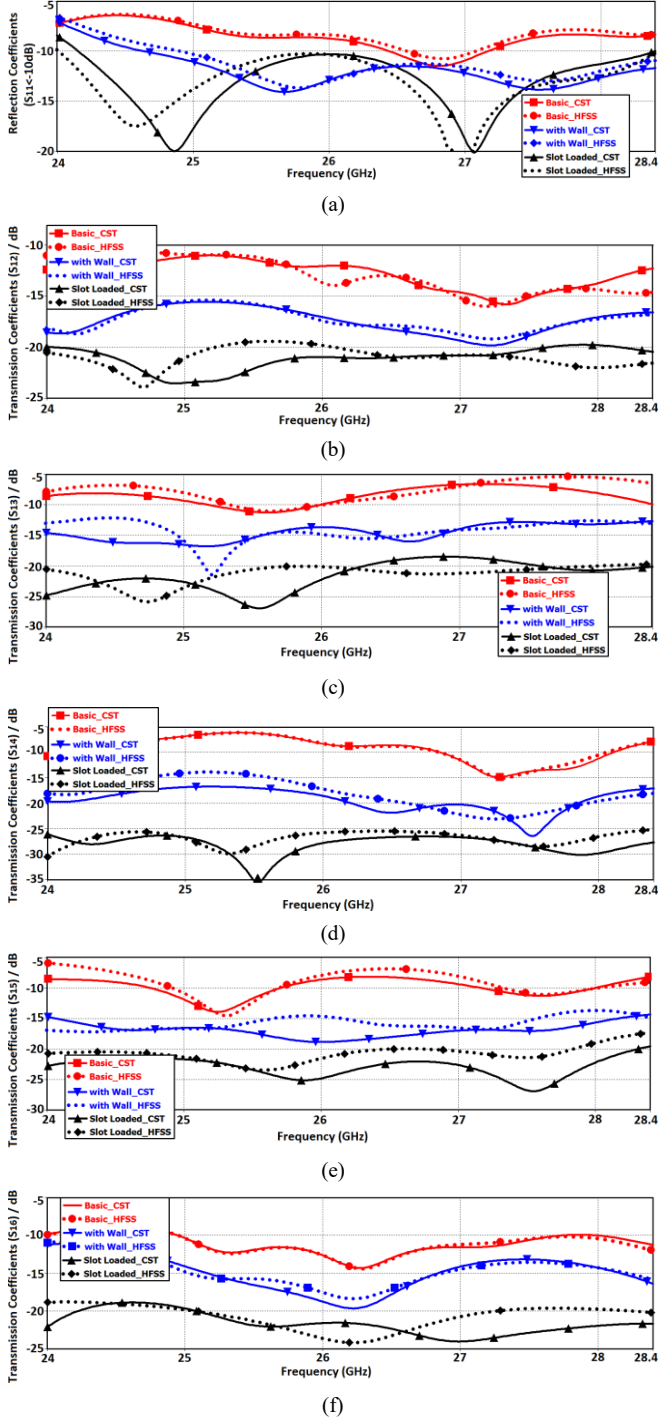


Fig.2. Active S-parameter response of the proposed antenna array, (a) reflection-coefficient ( $S_{11}$ ), (b) transmission-coefficient between antennas #1&#2 ( $S_{12}$ ), (c) transmission-coefficient between antennas #1&#3 ( $S_{13}$ ), (d) transmission-coefficient between antennas #1&#4 ( $S_{14}$ ), (e) transmission-coefficient between antennas #1&#5 ( $S_{15}$ ), (f) transmission-coefficient between antennas #1&#6 ( $S_{16}$ ), (g) transmission-coefficient between antennas #1&#7 ( $S_{17}$ ), (h) transmission-coefficient between antennas #1&#8 ( $S_{18}$ ), and (i) transmission-coefficient between antennas #1&#9 ( $S_{19}$ ).

Mutual coupling effects between the closely spaced radiating elements can cause unwanted distortion in the radiation characteristics of the array. This can adversely affect the overall far-field performance of the antenna array. Therefore, to suppress the near-field radiation emanating from each antenna in the array, an isolation wall wrapped around the individual antennas, as shown in Fig. 4. The wall is made from a perfect electric conductor. This simple technique does not affect the overall size of the antenna.

The active S-parameters and radiation properties of the array with the isolation wall are shown in Figs. 2 and 3. These results show that with the isolation wall the impedance bandwidth of the antenna array improves by a factor of four across 24.8 GHz - 28.4 GHz, which corresponds to a fractional bandwidth of 13.5%. The transmission-coefficient response in Figs. 2(b)-(i) show that the improvement in the average isolation between antennas #1&#2 is 5 dB, #1&#3 is 8 dB, #1&#4 is 9 dB, #1&#5 is 10 dB, #1&#6 is 5 dB, #1&#7 is 6 dB, and #1&#8 is 6 dB, and #1&#9 is 6 dB. These results are compared with the basic array in Table II.

Fig. 3 shows that CST predicts the average gain and efficiency of the antenna array to be 20.5 dBi and 93.5%, respectively, over 24.8 GHz - 28.4 GHz. Compared to the basic array this corresponds to an average improvement in

gain and efficiency of 10.5 dBi and 25%, respectively. With HFSS the average gain and efficiency are 19.2 dBi and 85%, respectively. These results are compared in Table III.

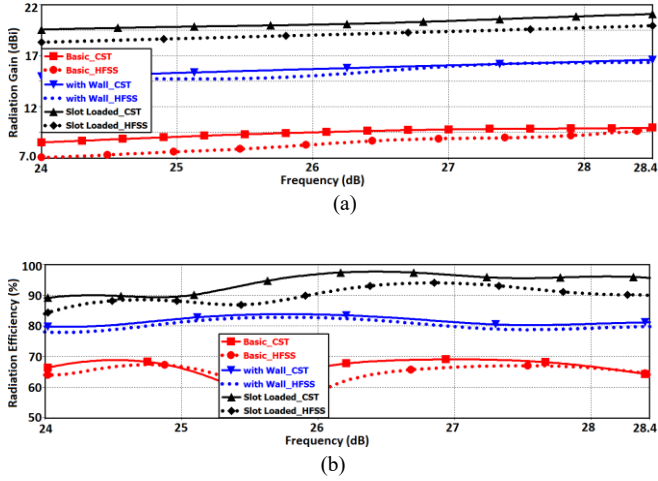


Fig.3. Radiation properties of the antenna array, (a) gain, and (b) efficiency.

TABLE II. S-PARAMETERS OF THE VARIOUS ANTENNA ARRAY STRUCTURES

Antenna Arrays	Reflection coefficient ( $S_{11} < -10\text{dB}$ )
Basic array	26.5 - 27.2 GHz (700 MHz & 2.6% FBW)
Array with wall	24.8 - 28.4 GHz (3.6 GHz & 13.5% FBW)
Array with slots	24.0 - 28.4 GHz (4.4 GHz & 16.8% FBW)
Improvement of slot array c.f. basic array	3.7 GHz & 14.2% FBW

Antenna Arrays	Average transmission coefficient (dB)							
	$S_{12}$	$S_{13}$	$S_{14}$	$S_{15}$	$S_{16}$	$S_{17}$	$S_{18}$	$S_{19}$
Basic array	12	6	11	7	11	12	10	13
Array with wall	17	14	20	17	16	18	16	19
Array with slot load	23	22	27	22	23	24	23	30
Improvement of slot array c.f. basic array	11	16	16	15	12	12	13	17

TABLE III. RADIATION CHARACTERISTICS WITH CST

Average gain (dBi)	
Basic array	9.5
Array with wall	15.7
Array with slot load	20.5
Improvement of slot array c.f. basic array	10.5

Average efficiency (%)	
Basic array	68
Array with wall	82
Array with slot load	93.5
Improvement of slot array c.f. basic array	25

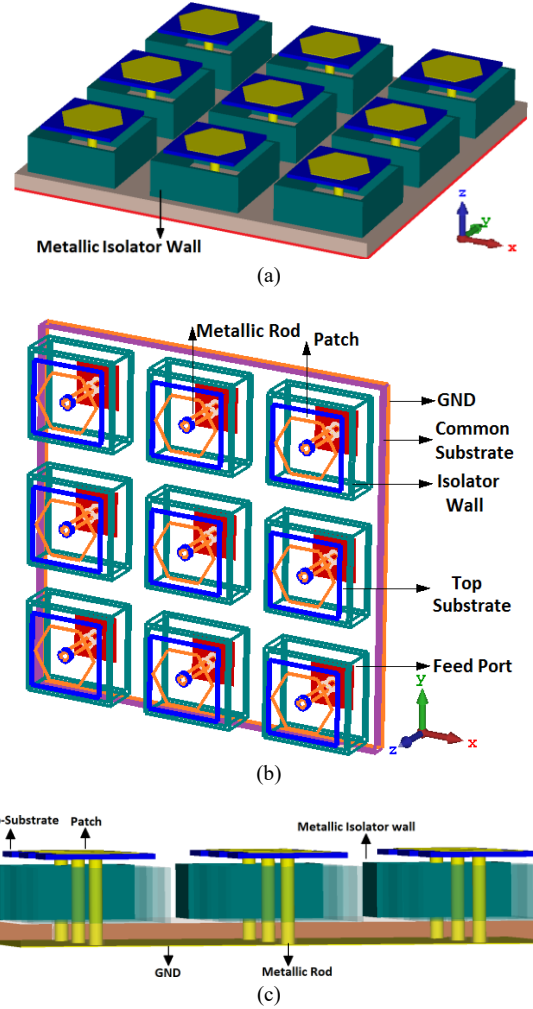


Fig.4. Antenna Array with the isolation walls, (a) isometric top-view, (b) schematic top-view to show the location of each structural element, and (c) side-view.

In order to improve the antenna's performance, the hexagonal-shaped patches are loaded with hexagonal-shaped slot rings of decreasing diameter, as shown in Fig.5. The rings are of subwavelength circumference and the width of the slots is 0.08 mm. When the slot loaded patches are exposed to EM-waves they behave like a metasurface as described in [13-15] that has an effect of magnify the aperture of the antenna array. Results from the 3-D EM-solvers, i.e., CST Microwave Studio and Ansoft HFSS, in Figs. 2 and 3 demonstrate that by introducing the slots the array's performance is improved. This is achieved without increasing the physical size of the antenna array. Moreover, the results show that the slots increase the array's impedance bandwidth by 4.4 GHz. Compared to the basic array in Fig.1 the bandwidth is increased by a factor of approximately six.

Fig. 2(b)-(i) show the average isolation improvement of the antennas #2 to #9 relative to antenna #1 in respectively order is: 11 dB, 16 dB, 16 dB, 15 dB, 12 dB, 12 dB, 13 dB, and 17 dB. The average isolation of the slotted patches in sequence from #2 to #9 with respect to antenna #1 is: 23 dB,

22 dB, 27 dB, 22 dB, 23 dB, 24 dB, 23 dB, and 30 dB. Fig.3 shows that with the slot loaded patch the gain and radiation efficiency improve significantly compared to the basic array in Fig.1. On average the gain increases by 10.5 dB and the efficiency increases by 25%. These results are compared in Table II.

The radiation characteristics of the proposed antenna array structure in its various forms, i.e., basic ‘with’ and ‘without’ the isolation wall and metasurface slots, are compared in Table III. It is shown that the array structure with the isolation wall and metasurface provides superior antenna performance. The excellent correlation between the two different 3-D numerical solvers shows the viability of the proposed array for millimeter-wave applications such as 5G wireless communications.

Comparison of the proposed antenna with the previously published antenna arrays operating in the same band is presented in Table IV. The comparison parameters include dimensions, substrate properties, bandwidth (BW), radiation gain, and efficiency. The comparison shows that the key performance of gain and efficiency are not possible with the other array approaches reported thus far considering the compact footprint area of the proposed array antenna.

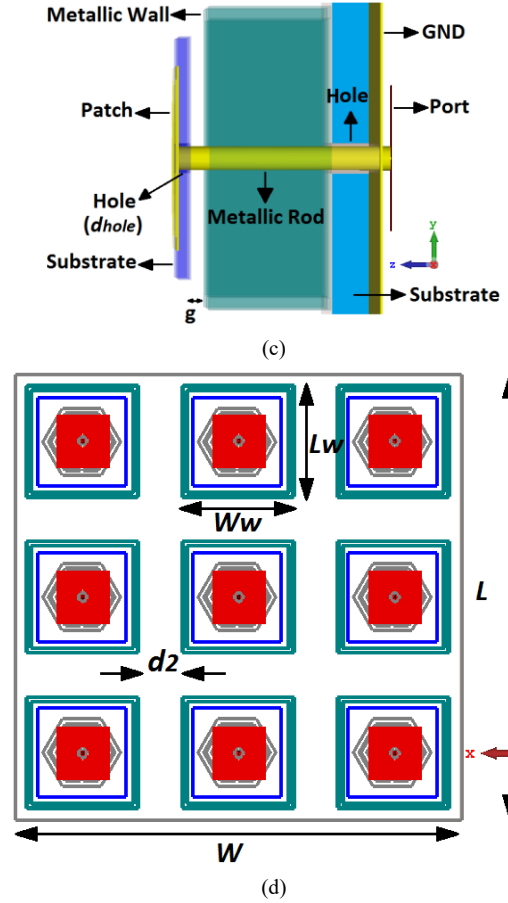
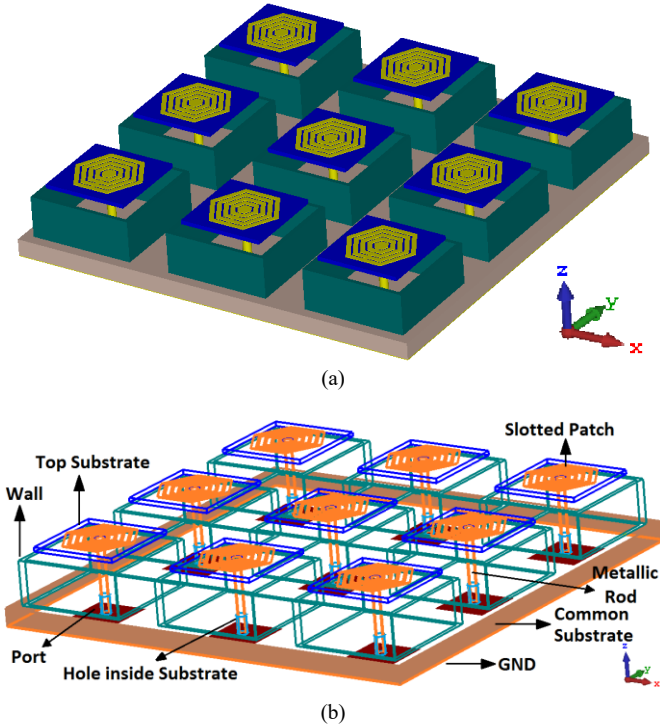


Fig.5. Proposed array antennas with isolation walls and loaded with metasurface slots, (a) isometric top-view, (b) schematic top-view to show the location of the geometrical parameters, (c) side view with zoomed single antenna to better displaying the feeding mechanism, and (d) schematic bottom-view to show the precise location of the structural parameters.

TABLE IV. PROPOSED ANTENNA ARRAY COMPARED WITH OTHER ARRAYS REPORTED IN LITERATURE.

Ref.	Size (mm <sup>2</sup> )	Substrate	Bandwidth / freq. range (GHz)	Gain (dBi)	Eff. (%)
[16]	20×20	Two different layers: (i) 1 mm FR4 (ii) 0.254 mm RO4350B	5.25 / 24.25–29.5	Max. 10	Max. 85
[17]	99.2×17.45	0.254 mm Rogers 5880	6.78 / 24.35–31.13	Max. 19.88	Max. 86
[18]	27×25	0.508 mm Roger 4003C	5 / 24–29	Max. 9	–
[19]	130×90	0.508 mm RO4003C	3 / 28–3	Max. 9.6	–
<b>This work</b>	<b>20×20</b>	<b>0.8 mm Rogers RT5880</b>	<b>4.4 / 24.0–28.4</b>	<b>Max. 21</b>	<b>Max. 98</b>

### III. CONCLUSION

A novel and compact nine element antenna array with shared aperture configuration is shown to exhibit high-gain and high radiation efficiency at the millimeter-wave 5G



band. The  $3 \times 3$  matrix antenna array is composed of hexagonal-shaped patches that are suspended above a common substrate and excited by metallic rods through the substrate. To minimize the adverse effects of mutual coupling between the radiators the individual antenna elements in the array were surrounded with a metallic wall. The patches were embedded with hexagonal-shaped slots to transform them to a metasurface. The proposed array structure exhibits an average gain and efficiency of 20 dBi and 93%, respectively, with isolation between the radiating elements better than 22 dB.

#### ACKNOWLEDGMENT

This project has received funding from Universidad Carlos III de Madrid and the European Union's Horizon 2020 research and innovation program under the Marie Skłodowska-Curie grant Agreement No 801538. Also, this work was partially supported by RTI2018-095499-B-C31, Funded by Ministerio de Ciencia, Innovación y Universidades, Gobierno de España (MCIU/AEI/FEDER,UE). In addition, the authors sincerely appreciate funding from Researchers Supporting Project number (RSP-2021/58), King Saud University, Riyadh, Saudi Arabia.

#### REFERENCES

- [1] T. S. Rappaport, Y. Xing, G. R. MacCartney, A. F. Molisch, E. Mellios, and J. Zhang, "Overview of millimeter wave communications for fifth-generation (5G) wireless networks—with a focus on propagation models," *IEEE Trans. Antennas Propag.*, vol. 65, no. 12, pp. 6213–6230, Dec. 2017.
- [2] W. Hong, K.-H. Baek, Y. Lee, Y. Kim, and S.-T. Ko, "Study and prototyping of practically large-scale mmWave antenna systems for 5G cellular devices," *IEEE Commun. Mag.*, vol. 52, no. 9, pp. 63–69, Sep. 2014.
- [3] D. Lockie and D. Peck, "High-data-rate millimeter-wave radios," *IEEE Microw. Mag.*, vol. 10, no. 5, pp. 75–83, Aug. 2009.
- [4] J. Zhu, S. Liao, S. Li, and Q. Xue, "60 GHz Wideband high-gain circularly polarized antenna array with substrate integrated cavity excitation," *IEEE Antennas Wirel. Propag. Lett.*, vol. 17, no. 5, pp. 751–755, May 2018.
- [5] J. Wu, Y. J. Cheng, and Y. Fan, "Millimeter-wave wideband high-efficiency circularly polarized planar array antenna," *IEEE Trans. Antennas Propag.*, vol. 64, no. 2, pp. 535–542, Feb. 2016.
- [6] S. K. Agrawal and K. Sharma, "5G millimeter wave (mmWave) communications," 2016 3rd International Conference on Computing for Sustainable Global Development (INDIACom), Mar. 2016, pp. 3630–3634.
- [7] M. Alibakhshikenari, B. S. Virdee, A. A. Althuwayb, et al., "Study on on-chip antenna design based on metamaterial-inspired and substrate-integrated waveguide properties for millimetre-wave and THz integrated-circuit applications," *J. Infrared, Millimeter, and Terahertz Waves*, vol. 42, 2021, pp. 17–28.
- [8] L. Wei, R. Q. Hu, Y. Qian, and G. Wu, "Key elements to enable millimeter wave communications for 5G wireless systems," *IEEE Wirel. Commun.*, vol. 21, no. 6, Dec. 2014, pp. 136–143.
- [9] V. L. Nguyen, P. Lin and R. Hwang, "Enhancing misbehavior detection in 5G vehicle-to-vehicle communications," *IEEE Transactions on Vehicular Technology*, vol. 69, issue 9, 2020, pp. 9417-9430.
- [10] S. J. Li, Y. B. Li, L. Zhang, Z. J. Luo, B. W. Han, R. Q. Li, X. Y. Cao, Q. Cheng, and T. J. Cui, "Programmable controls to scattering properties of a radiation array," *Laser & Photonics Reviews*, vol. 15, 2000449, Feb. 2021, pp. 1-9.
- [11] S. J. Li, Y. B. Li, R. Q. Li, Q. Cheng, and T. J. Cui, "Digital-coding-feeding metasurfaces for differently polarized wave emission, orbit angular momentum generation, and scattering manipulation," *Advanced Photonics Research*, vol. 1, 2000012, November 2020.
- [12] M. Alibakhshikenari, B. S. Virdee et al., "Singular integral formulations for electrodynamic analysis of metamaterial-inspired antenna array," *IEEE Antennas and Wireless Propagation Letters*, vol. 20, no. 2, Feb. 2021, pp.179-183.
- [13] S. S. Bukhari, J. Vardaxoglou, W. Whittow, "A metasurfaces review: definitions and applications," *Applied Sciences*, vol. 9, no. 2727, 2019, pp. 1-14.
- [14] Z. Wang, C. Li, and Y. Yin, "A meta-surface antenna array decoupling (MAAD) design to improve the isolation performance in a MIMO system," *IEEE Access*, vol. 8, 2020, pp.61797-61085.
- [15] W. Zhang, C. Song, R. Pei, Y. Huang, & J. Zhou, "Broadband metasurface antenna using hexagonal loop-shaped unit cells," *IEEE Access*, vol. 8, 2020, pp. 223797-223805.
- [16] I. Lima de Paula et al., "Cost-effective high-performance air-filled siw antenna array for the global 5G 26 GHz and 28 GHz bands," *IEEE Antennas and Wireless Propagation Letters*, vol. 20, no. 2, Feb. 2021, pp. 194-198.
- [17] M. Khalily, R. Tafazolli, P. Xiao and A. A. Kishk, "Broadband mm-wave microstrip array antenna with improved radiation characteristics for different 5G applications," *IEEE Transactions on Antennas and Propagation*, vol. 66, no. 9, Sept. 2018, pp. 4641-4647.
- [18] M. Borhani Kakhki, M. Mantash, A. Kesavan, M. M. Tahseen and T. A. Denidni, "Millimeter-wave beam-tilting vivaldi antenna with gain enhancement using multilayer FSS," *IEEE Antennas and Wireless Propagation Letters*, vol. 17, no. 12, Dec. 2018, pp. 2279-2283.
- [19] M. Mantash, A. Kesavan and T. A. Denidni, "Beam-tilting endfire antenna using a single-layer FSS for 5G communication networks," *IEEE Antennas and Wireless Propagation Letters*, vol. 17, no. 1, Jan. 2018, pp. 29-33.



**Mohammad Alibakhshikenari** (Member, IEEE) was born in Mazandaran, Iran, in February 1988. He received the Ph.D. degree (Hons.) in electronic engineering from the University of Rome "Tor Vergata," in February 2020. He is now with

the Department of Signal Theory and Communications of the Universidad Carlos III de Madrid (UC3M) as a principal investigator of the CONEX-Plus (CONnecting EXcellence to UC3M) which is a talent training and mobility programme under Marie Skłodowska-Curie Actions (MSCA) funded by the European Union's Horizon 2020 research and innovation programme. He was a Ph.D. Visiting Researcher with the Chalmers University of Technology, in 2018. His training during the Ph.D. included a research stage in the Swedish company Gap Waves AB. His research interests include antennas and wave-propagations, metamaterials and metasurfaces, synthetic aperture radars (SAR), multipleinput multiple-output (MIMO) systems, substrate integrated waveguides (SIWs), impedance matching circuits, microwave components, millimeterwaves and terahertz integrated circuits, and electromagnetic systems. The above research lines have produced more than 120 publications on international journals, presentations within international conferences, and book chapters with a total number of the citations more than 1900 and H-index of 33. He was a recipient of two Young Engineer Awards of the 47th and 48th European Microwave Conference held in Nuremberg, Germany (2017) and in Madrid, Spain (2018), respectively. His research article entitled "High Gain Metasurface in Polyimide On-Chip Antenna Based on CRLH-TL for Sub Terahertz Integrated Circuits" published in Scientific Reports was awarded as the best month paper at the University of Bradford in April 2020. He was a recipient of (i) three years research grant funded by the Universidad Carlos III de Madrid and the European Union's Horizon 2020 research and innovation programme under the Marie Skłodowska-Curie grant started, in July 2021, (ii) two years research grant funded by the University of Rome "Tor Vergata" started, in November 2019, and (iii) three years Ph.D. Scholarship funded by the University of Rome "Tor Vergata" started, in November 2016. He is serving as an Associate Editor for IET Journal of Engineering and International Journal of Antennas and Propagation. He also acts as a referee in several highly reputed journals and international conferences.



**Bal S. Virdee (SM'08)** received the B.Sc. and MPhil degrees in Communications-Engineering from the University of Leeds-UK and his Ph.D. in Electronic-Engineering from the University of London-UK. He has worked in industry for various companies including Philips (UK) as an R&D-engineer and Filtronic-Components Ltd. as a future products developer in the area of RF/microwave communications. He has taught at several academic institutions before joining

London Metropolitan University where he is a Professor of Microwave-Communications in the Faculty of Life Sciences&Computing where he Heads the Center for Communications-Technology and is the Director of London Metropolitan-Microwaves. His research, in collaboration with industry and academia, is in the area of microwave wireless communications encompassing mobile-phones to satellite-technology. Prof. Virdee has chaired technical sessions at IEEE international conferences and published numerous research-papers. He is Executive-Member of IET's Technical and Professional Network Committee on RF/Microwave-Technology. He is a Fellow of IET and a Senior-Member of IEEE.



**María Elena De Cos Gómez** received the M.S. and Ph.D. degrees from the Universidad de Cantabria, in 2002 and 2006, respectively. She was involved in nonlinear dynamics: stability and phase-noise analysis of nonlinear circuits, such as oscillators, frequency dividers, self-oscillating mixers, and multiharmonic generators. She was a Researcher Engineer in collaboration with ACORDE S.A from 2004 to 2007. She joined

TSC-UNIOVI in 2007. She was an Invited Professor with the I.E.T.R. Rennes, France, in 2011 and 2014, respectively. She was an Associate Editor of the International Journal of Antennas and Propagation. Her research interests are metamaterials design and its applications to antennas and microwave circuits, design of antennas for RFID systems, location techniques, and wireless sensor networks design and applications.



**Ayman A. Althuwayb** received the B.Sc. degree (Hons.) in electrical engineering (electronics and communications) from Jouf University, Saudi Arabia, in 2011, the M.Sc.

degree in electrical engineering from California State University, Fullerton, CA, USA, in 2015, and the Ph.D. degree in electrical engineering from Southern Methodist University, Dallas, TX, USA, in 2018. He is currently an Assistant Professor with the department of electrical engineering at Jouf University, Kingdom of Saudi Arabia. His current research interests include antenna design and propagation, microwaves and millimeter-waves, wireless power transfer, ultrawideband and multiband antennas, filters and other.



**Issa Elfergani** obtained his M.Sc. and Ph.D. degrees in electrical and electronic engineering from University of Bradford, UK, in 2008 and 2013, respectively. After his Ph.D. since 2013, he was working as "Postdoctoral Researcher" and then as "Investigador junior" at Instituto de Telecomunicações Aveiro, Portugal within the Mobile Systems group. In 2014 Issa received prestigious FCT fellowship for his postdoctoral research. The evaluation of the first triennium of this scholarship was given an excellent rating by the evaluators. In 2019 Issa received a contract "Investigador júnior". He has been involved in several R&D Projects such as Agile RF Transceivers and Front-Ends for Future Smart Multi-Standard Communications Applications (ARTEMOS), where he was the task Leader of "Development of tunable filters and tunable resonators" and technical responsible investigator of designing the RF tunable bandpass filter operating over a wide continuous frequency range from 1800 MHz to 2600 MHz for use in GSM and LTE applications, Green Terminals for Next Generation Wireless Systems (GREEN-T), where IT were the coordinator. Best energy efficiency solutions for heterogeneous multi-core communicating systems (BENEFIC) and Coexistence of RF transmissions in the future (CORTIF, where he was the task leader of "Test results and validation" in CORTIF project. He is also a member of IEEE and AASCIT.



**Chemseddine Zebiri** received his Ph.D. degree in electronics from the University of Constantine, Algeria, in 2011. He has been with the Department of Electronics, University of Ferhat Abbas, Setif, Algeria since 2006, where he is currently an associate professor at the same University. Dr Zebiri has published up to 66 Journals and refereed conference papers. His current research interests are dielectric resonator antennas, MIMO antennas, mmWave antennas, magnetic materials, complex material components in the microwave and optical domains.



**Jonathan Rodriguez** received his Master's degree in Electronic and Electrical Engineering (Hons) and Ph.D from the University of Surrey (UK), in 1998 and 2004 respectively. In 2005, he became a researcher at the Instituto de Telecomunicações (Portugal) where he was a member of the Wireless Communications Scientific Area. In 2008, he became a Senior Researcher where he established the 4TELL Research Group targeting next-generation

mobile systems. He has served as project coordinator for major international research projects, including Eureka LOOP and FP7 C2POWER whilst serving as technical manager for FP7 COGEU and FP7 SALUS. He is currently the coordinator of the H2020-MSCA-SECRET Innovative Training Network. Since 2009 he has served as Invited Assistant Professor at the University of Aveiro (Portugal) and attained Associate Level in 2015. In 2017 he was appointed Professor of Mobile Communications at the University of South Wales (UK). He is author of more than 500 scientific works, including 11 book editorials. His professional affiliations include Senior Member of the IEEE (SMIEEE) and Chartered Engineer (CEng) since 2013 and Fellow of the IET (2015).



**Francisco Falcone (M'05, SM'09)** received the degree in telecommunication engineering and the Ph.D. degree in communication engineering from the Universidad Pública de Navarra (UPNA), Spain, in 1999 and 2005, respectively. From February 1999 to April 2000, he was the Microwave Commissioning Engineer at Siemens-Italtel, deploying microwave access

systems. From May 2000 to December 2008, he was a Radio Access Engineer at Telefónica Móviles, performing radio network planning and optimization tasks in mobile network deployment. In January 2009, as a co-founding member, he has been the Director of Tafo Metawireless, a spin-off company from UPNA, until May 2009. In parallel, he is an Assistant Lecturer with the Electrical and Electronic Engineering Department, UPNA, from February 2003 to May 2009. In June 2009, he becomes an Associate Professor with the EE Department, being the Department Head, from January 2012 to July 2018. From January 2018 to May 2018, he was a Visiting Professor with the Kuwait College of Science and Technology, Kuwait. He is also affiliated with the Institute for Smart Cities (ISC), UPNA, which hosts around 140 researchers. He is currently acting as the Head of the ICT Section. His research interests are related to computational electromagnetics applied to the analysis of complex electromagnetic scenarios, with a focus on the analysis, design, and implementation of heterogeneous wireless networks to enable context-aware environments. He has over 500 contributions in indexed international journals, book chapters, and conference contributions. He has been awarded the CST 2003 and CST 2005 Best Paper Award, the Ph.D. Award from the Colegio Oficial de Ingenieros de Telecomunicación (COIT), in 2006, the Doctoral Award UPNA, 2010, 1st Juan Gomez Peñalver Research Award from the Royal Academy of Engineering of Spain, in 2010, the XII Talgo Innovation Award 2012, the IEEE 2014 Best Paper Award, 2014, the ECSA-3 Best Paper Award, 2016, and the ECSA-4 Best Paper Award, 2017.



**Ernesto Limiti** (S'87–M'92–SM'17) is a full professor of Electronics in the Engineering Faculty of the University of Roma Tor Vergata since 2002, after being research and teaching assistant (since 1991) and associate professor (since 1998) in the same University. Ernesto Limiti represents University of Roma Tor Vergata in the governing body of the MECSA (Microwave Engineering Center for Space Applications), an inter-university center among several Italian Universities. He has been

elected to represent the Industrial Engineering sector in the Academic Senate of the University for the period 2007-2010 and 2010-2013. Ernesto Limiti is actually the president of the Consortium "Advanced research and Engineering for Space", ARES, formed between the University and two companies. Further, he is actually the president of the Laurea and Laurea Magistrale degrees in Electronic Engineering of the University of Roma Tor Vergata. The research activity of Ernesto Limiti is focused on three main lines, all of them belonging to the microwave and millimetre-wave electronics research area. The first one is related to characterisation and modelling for active and passive microwave and millimetre-wave devices. Regarding active devices, the research line is oriented to the small-signal, noise and large signal modelling. Regarding passive devices, equivalent-circuit models have been developed for interacting discontinuities in microstrip, for typical MMIC passive components (MIM capacitors) and to waveguide/coplanar waveguide transitions analysis and design. For active devices, new methodologies have been developed for the noise characterisation and the subsequent modelling, and equivalent-circuit modelling strategies have been implemented both for small and large-signal operating regimes for GaAs, GaN, SiC, Si, InP MESFET/HEMT devices. The second line is related to design methodologies and characterisation methods for low noise circuits. The main focus is on cryogenic amplifiers and devices. Collaborations are currently ongoing with the major radioastronomy institutes all around Europe within the frame of FP6 and FP7 programmes (RadioNet). He is actively involved in research activities with many research groups, both European and Italian, and he is in tight collaborations with high-tech Italian (Selex - SI, Thales Alenia Space, Rheinmetall, Elettronica S.p.A., Space Engineering ...) and foreign (OMMIC, Siemens, UMS, ...) companies. He contributed, as a researcher and/or as unit responsible, to several National (PRIN MIUR, Madess CNR, Agenzia Spaziale Italiana) and international (ESPRIT COSMIC, Manpower, Edge, Special Action MEPI, ESA, EUROPA, Korrigan, RadioNet FP6 and FP7 ...) projects. Regarding teaching activities, He is a member of the committee of the PhD program in Telecommunications and Microelectronics at the University of Roma Tor Vergata, tutoring an average of four PhD candidates per year.